

E S T  
A

# SETA



**PHYSICAL SPEC.**

**COLOUR FASTNESS  
TO-AND-FRO RUBBING**

UNI EN ISO 11640  
500 dry cycles,  
≥ 4 degradation, ≥ 4 staining  
UNI EN ISO 11640  
250 wet cycles,  
≥ 3/4 degradation, ≥ 3/4staining  
UNI EN ISO 11640  
80 alk. perspiration cycles,  
≥ 3/4 degradation, ≥ 3/4staining

**COLOUR FASTNESS  
TO LIGHT**

EN ISO 105-B02  
xenotest, ≥ 4 blue scale

**TEAR STRENGHT**

UNI EN ISO 3377-1  
≥ 20 N

**WATER SPOTTING**

UNI EN ISO 15700  
≥ 3 grey scale

**FINISH ADHESION**

UNI EN ISO 11640  
≥ 2 N/cm

**FLEXING ENDURANCE**

UNI EN ISO 5402  
≥ 50.000 cycles

**COLD CRACK RESISTANCE OF  
FINISH**

UNI EN ISO 3377-1  
-15° , no crack

**FIRE RESISTANCE**

UNI EN 1021-1, UNI EN 1021-2,  
BS 5852/0, BS 5852/1

**TECHNICAL SPEC.**

**RAW MATERIAL/APPEARANCE**  
bovine/natural grain

**THICKNESS**

0,9 - 1,0 mm

**TANNING**

mineral chrome


**COLOR TYPE**

solid tone

**DYEING**

through-dyeing Aniline



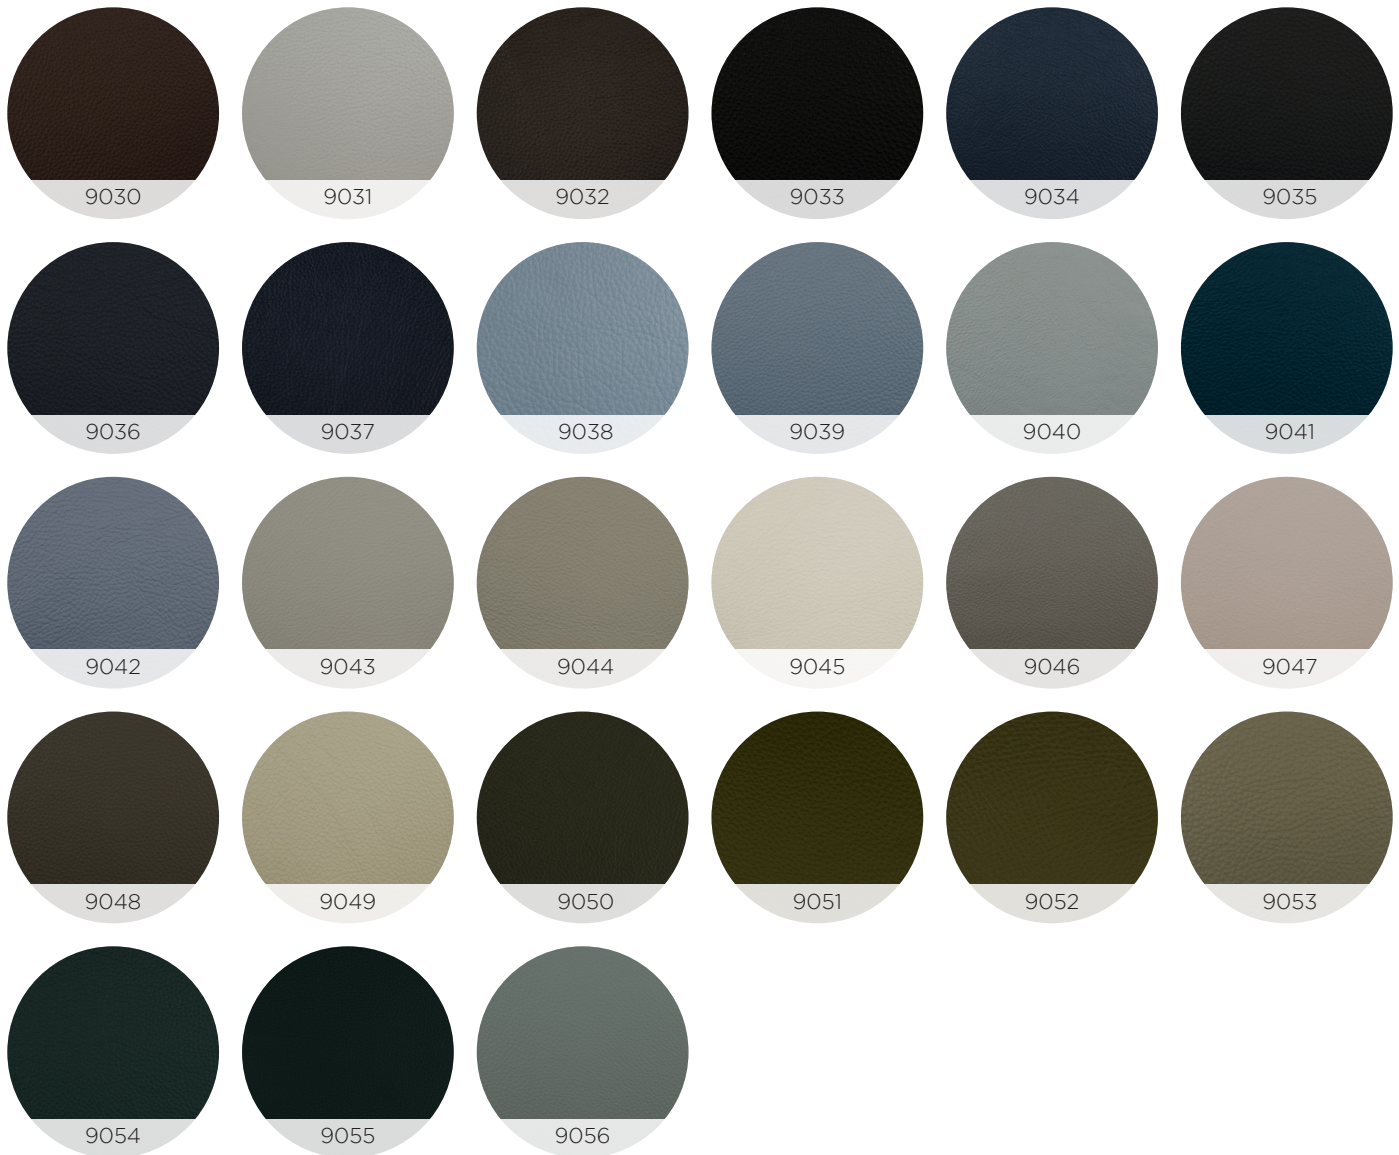

**GENERAL WARNINGS**

slight differences in colour may occur

**MAINTENANCE AND CLEANING**

dust with a soft and dry cloth; remove stains using a damp cloth and neutral soap or a delicate detergent. Buffer from the edges to the stain centre. No abrasive/aggressive products; no product for shoes cleaning; no steam; no direct sunlight; no direct heat

**bolzan**